

# PermaBag®

## For outdoor use

### PermaBag® for outdoor use complete with:

- Auto-Storm® Top Cover for extra padding
- Silver Cover for outdoor weather protection
- PermaPack® moisture absorbing cylinders
- Digital Thermo-Hygrometer
- Set of Storm-Straps
- Brass lock for PermaBag

## Directions

1. Choose a dry day with low humidity. A sunny dry day will accelerate the drying procedure.
2. Check that engine and exhaust are cool.
3. Check that car mats are dry and no perishable food is inside the car.
4. Check all rubber hoses and connectors, giving special attention to fuel lines, fuel tank and water hoses such as the cooling system, wiper system, fuel system.
5. Remove tools and all private belongings.
6. To prevent odours a packet of Bicarbonate of Soda may be placed inside the car.  
Do not use mothballs or any other toxic products.
7. Open side windows and retract or remove antennas.
8. Choose a suitable location, if possible protected from wind, storm and sun. The ground should be non-porous and firm such as asphalt, gravel or cement. Do not park on earth, grass or sand!
9. Make sure the ground is free from all types of sharp objects prior to proceeding. **Installation:**
10. Lay the **3 Storm Straps** on to the ground where the car is to be parked (see Picture 1 on reverse side)
11. Lay the **PermaBag** (zip still closed) on top of the three straps. All 6 ends of the 3 straps should be visible. Unzip PermaBag and unfold. The three straps should be located underneath the section with the yellow patch. The yellow patch should now be visible at the front left-hand corner.
12. Push the car on to the material so that the yellow patch is level with the front left-hand corner of the car. Cabriolet cars must have their soft top up in order to prevent a puddle from accumulating!
13. If **TireShoes** are to be used these should now be placed underneath the tyres.
14. Place some form of oil-spill protection underneath the engine if necessary.
15. Now place the **grey Auto-Storm® Top-Cover** on to the car.

16. Fold **PermaBag** over the top of the car and zip up two of the three sides.
17. Slip the **Thermo-Hygrometer** in to the designated pouch, located behind the see-through window.
18. Remove the transparent plastic wrapping & brown paper from the **PermaPack** stainless steel cylinders and place the active cylinders underneath the car, close to where the zipper ends. Now zip up the 3<sup>rd</sup> side of PermaBag and lock by means of the **Brass Lock** included.
19. Finally cover the PermaBag with the **Silver Auto-Pyjama® Cover** (for protection against rain, hail, snow, dirt and UV-light). Buckle up the 3 straps around the width of the car - one at the front, one at the centre and one at the back. Proper final strapping will prevent flapping as well as chaffing of the bodywork during windy and stormy conditions.
20. There are 3 small loops at the front end and the back end of the **Silver Cover**. These loops can be used to prevent the ends of the cover from blowing upwards during stormy conditions. A cord can be passed through these loops and tied underneath the car. The grommets on both sides of the cover allow for a **Cable & Lock**, fixed under the car and available as an extra accessory.
21. To regenerate the **PermaPack** cylinders please refer to the separate directions. Store cylinders in a dry, ventilated location when not in use and regenerate prior to next use.  
The amount of cylinders included is based on central European conditions. If PermaBag is to be used under hot and humid conditions extra moisture absorbing cylinders will be required.
22. Check the readings of the thermo-hygrometer at regular intervals in order to confirm the humidity conditions inside PermaBag.


#### **Regeneration of PermaPack Cylinders:**

For safety reasons it is recommended to regenerate PermaPack after 3 months. To regenerate and store the PermaPack cylinders please refer to the separate directions.

#### **WARNING!**

Petroleum fumes may have accumulated PermaBag. Do not open near a flame, do not smoke!  
PermaBag should be kept away from children and pets.  
Never start an engine inside PermaBag.

Graph shows safe storage conditions at different temperatures  
and depicts how rel humidity is affected by temperature

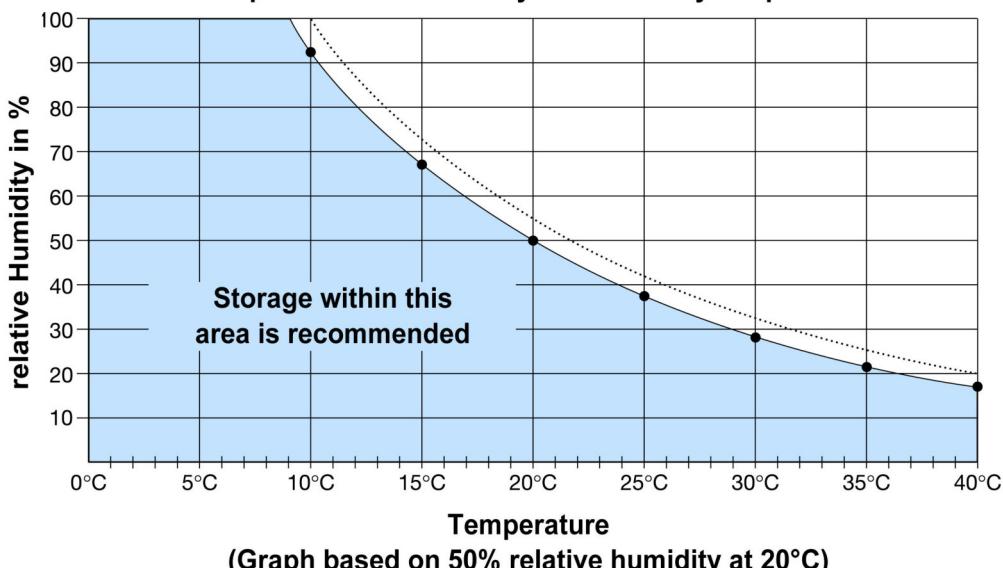

## **PermaBag® for Outdoor Use**

### **- Strapping Instructions -**

Pic 1: Lay out the security straps (3 long + 5 short)



Pic 2: Unfold PermaBag over the straps



Pic 3: Position car. Cover with grey Car Cover and fold the PermaBag over the car



Pic 4: Place the Hygrometer and PermaPack-cylinders in to the PermaBag and close the zip



Pic 5: Place the Silver Cover on to the car



Pic 6: Secure the 8 straps and pull them tight

